




RoHS

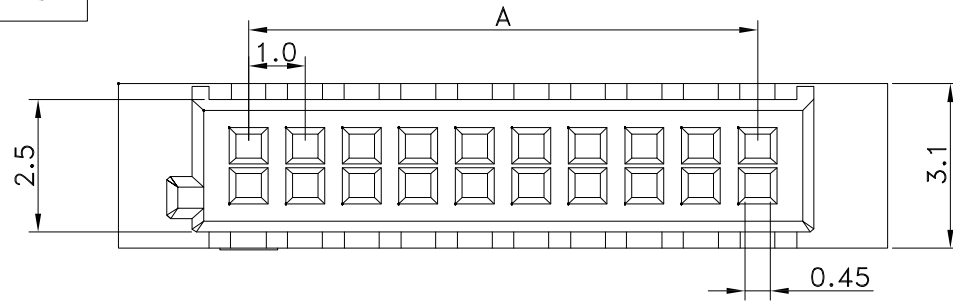

Specifications:

Electrical
 Rated Voltage: 50V AC,DC
 Rated Current: 1A
 Withstand Voltage: 500V AC/minute
 Contact Resistance: 20mΩ (MAX.)
 Insulation Resistance: 100MΩ (MIN.)
 Temperature Range: -25°C~+85°C

Material and Finish:
 Circuits: 16,20,30,40,50
 Color:natural(white)
 Material: Nylon UL94V-0
 Use With:A1006T
 Mates With::A1000WRD

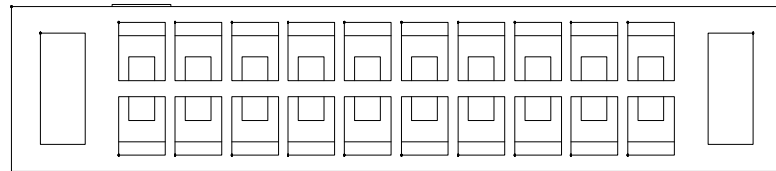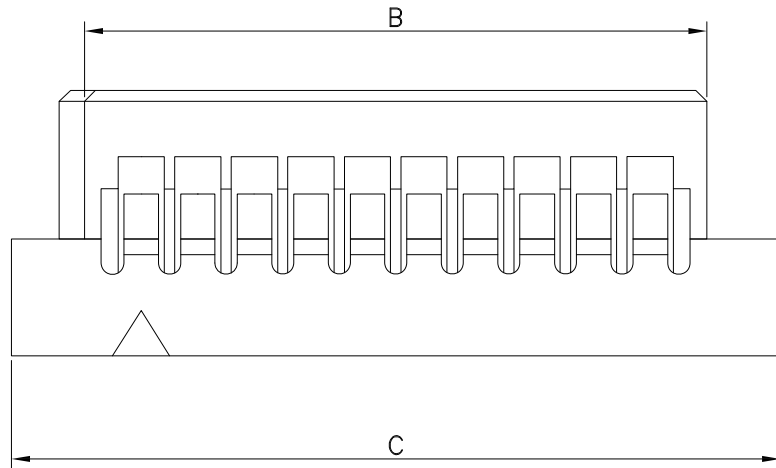

Dimensional & Ordering Information:

Cir- cuits	Part No	Dimension mm			Q' ty/ bag
		A	B	C	
16	A1000H-16	7.0	9.0	11.6	1,000
20	A1000H-20	9.0	11.0	13.6	1,000
30	A1000H-30	14.0	16.0	18.6	1,000
40	A1000H-40	19.0	21.0	23.6	1,000
50	A1000H-50	24.0	26.0	28.6	1,000

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
1						

GENERAL TOLERANCE
 .X ±0.3
 .XX ±0.2
 .XXX ±0.1



东莞市国亚电子有限公司
 Dong Guan Guo Ya Connectors co., ltd

料号 PART NO
 A1000H-NP

品名 TITLE
 1.00mm Crimp Style connectors


APPROVAL	CHECK	DRAWN	DATA
Yangzhengguo	Yangzhengyi	Lviansheng	2018/10/25

UNIT	SCALE	NUMBER	REV
MM	1:1	A-004	A0

RoHS

Specifications:

Electrical
 Rated Voltage: 50V AC,DC
 Rated Current: 1A
 Withstand Voltage: 500V AC/minute
 Contact Resistance: 20mΩ (MAX.)
 Insulation Resistance: 100MΩ (MIN.)
 Temperature Range: -25°C~+85°C
 Material and Finish:
 plate-gold:A1000T-Go
 Use With:A1000H

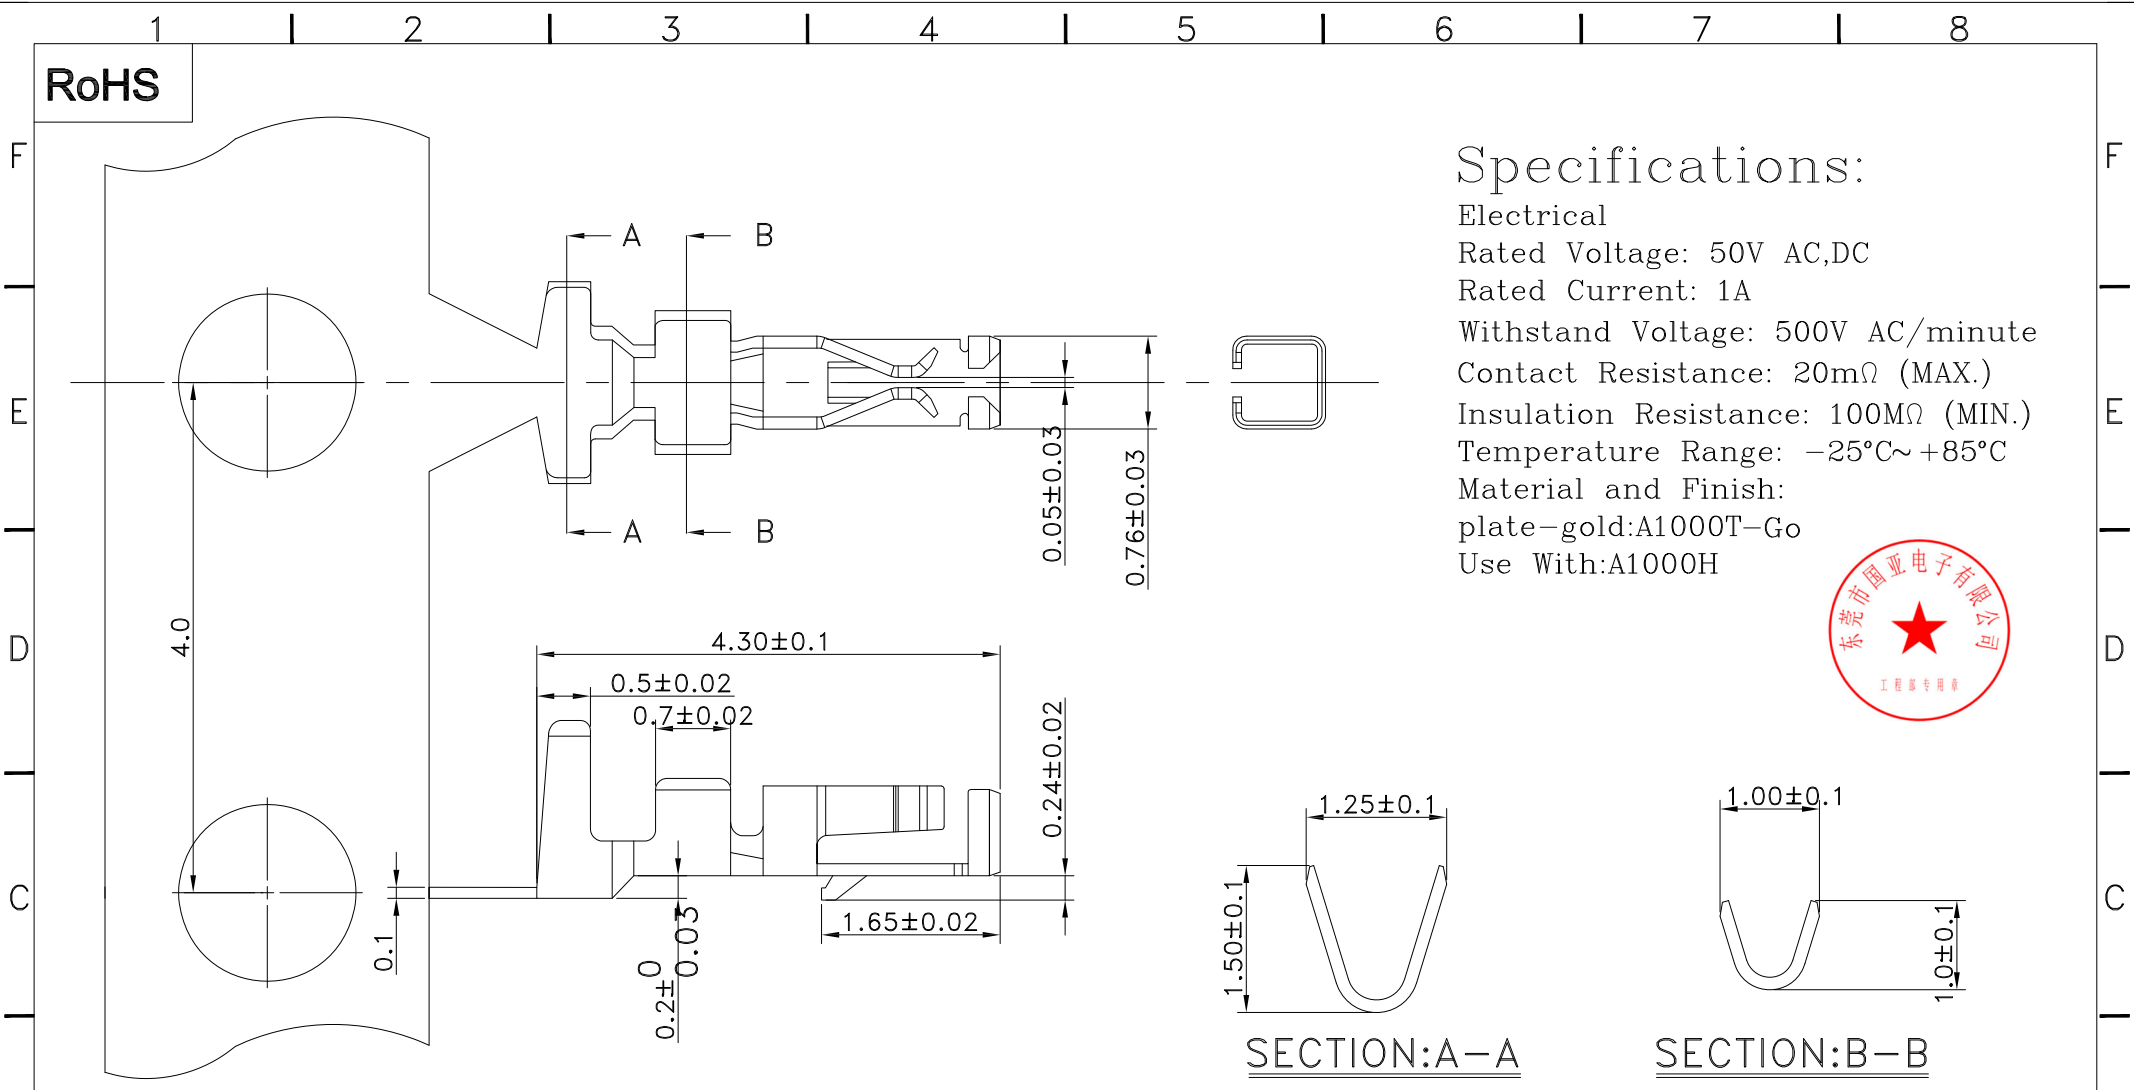

SECTION:A-A

SECTION:B-B

Material	Finish	Wire Range	Insulation O.D	Qty/reel
Phosphor bronze	Gold-plated	AWG#28-#32	0.80mm	15,000pcs

				GENERAL TOLERANCE . X ±0.3 . XX ±0.2 . XXX ±0.1		GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., Ltd.		料号 PART NO A1000T-XXX			
						APPROVAL Yangzhengguo CHECK Yangzhengyi DRAWN Lviansheng DATA 2018/10/25		品名 TITLE 1.00mm Crimp Style connectors			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	UNIT	SCALE	NUMBER	REV
1			2				⊕ ⊖	MM	1:1	A-004	A0